


DISCHIERA IDROPNEUMATICA PORTATA

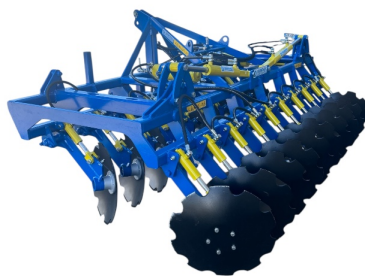

The RAPID is the ultimate solution for farmers requiring absolute versatility on all types of terrain. Designed for shallow tillage and the effective incorporation of crop residues, it combines operational speed with surgical precision. The DIR RAPID guarantees optimal soil refinement in a single pass, whether the soil is loose, hard or heavily stony.

Key Features

- **Absolute Directional Stability:** The 'X' disc arrangement prevents sideways drift, enabling the machine to travel in a perfectly straight line without the tractor needing to correct its path. This drastically reduces fuel consumption.
- **Exclusive Dual Accumulator:** It is unique on the market thanks to its two separate hydro-pneumatic accumulators (one per row), which allow for independent control of depth and stability. This ensures a clean finish, even in mixed soil conditions.
- **Hydropneumatic No-Stop System:** Each disc operates independently and is protected. In the event of stones or obstacles, the individual module instantly lifts and repositions itself without forcing the operator to stop.
- **Anti-Clogging Efficiency:** Thanks to the generous spacing of 29 cm between the discs, the machine can quickly discharge soil and large amounts of crop residue, such as maize, thereby preventing operational blockages.
- **Simplified Logistics:** Models up to the RAPID-28 are fitted with a 2.50-metre hydraulic folding mechanism that enables them to be transported quickly and safely on the road without the need for special permits.
- **Working Depth:** It is precisely adjustable down to 10 cm, making it ideal for mechanical weed control and seedbed preparation.
- **Performance:** Tests have demonstrated that the DIR RAPID's combined shredding and levelling action reduces working times, making it an 'all-in-one' solution for farm optimisation.

Technical Data

						
Model	FOLDING	UNITS	MIN. OVERALL WIDTH	WORKING WIDTH	WEIGHT	POWER
	TIPO	N	CM	CM	KG	HP
RAPID-18		18	278	278	1100	90-100
RAPID-20	IDRAULICO	20 (16+4)	248	300	1270	90-100
RAPID-24	IDRAULICO	24 (16+8)	248	350	1530	110-130
RAPID-28	IDRAULICO	28 (16+12)	248	400	1750	140-160
RAPID-30	IDRAULICO	30 (18+12)	278	450	1850	160-200
RAPID-34	IDRAULICO	34(18+16)	278	500	2100	180-200
RAPID-32S	IDRAULICO	32(20+12)	310	480	1950	180-200
RAPID-36S	IDRAULICO	36 (20+16)	310	540	2200	200-250

Included accessories

Hydraulic locking mechanism for locking pins